

## Rubber gasket rings

Diameter:  $\varnothing 80$  -  $\varnothing 300$  mm.

Standard rubber gasket rings are made of EPDM 80 rubber and used for f.b. assemblies to improve degree of tightness.


One ring is fitted for each assembly.  
Rings are fitted on either f.b. edge before assembly.

Rubber gasket rings are U-shaped in cross section.  
Hardness is 80 shore, and working temperature range is  $-40^{\circ}\text{C}$  to  $+100^{\circ}\text{C}$ .

Same dimensions are available in NITRIL rubber.  
Hardness is 80 shore, and working temperature range is  $-15^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$ .

NITRIL rubber is resistant to oil and petrol, and to some degree to acids and bases.

Supplied in plastic bags of 10 pcs.

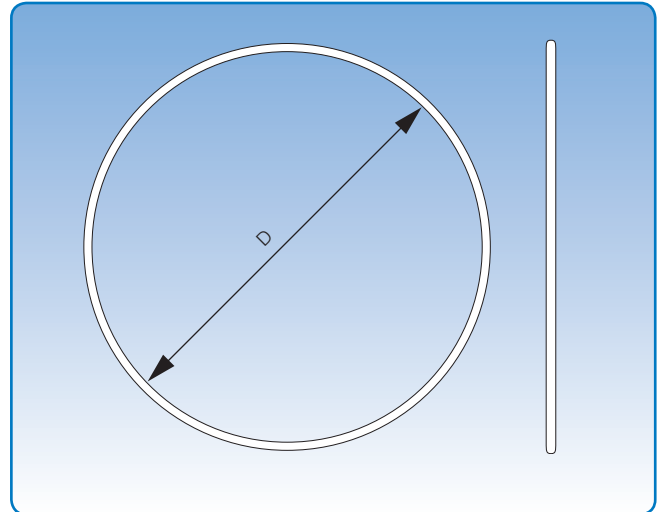

Dimensional specifications are given in the table below.

| Item no.  | Dimensions |                   |
|-----------|------------|-------------------|
|           | D mm       | Weight/10 pcs. kg |
| 820170080 | 80         | 0,20              |
| 820170100 | 100        | 0,30              |
| 820170120 | 120        | 0,50              |
| 820170125 | 125        | 0,50              |
| 820170140 | 140        | 0,60              |
| 820170150 | 150        | 0,60              |
| 820170160 | 160        | 0,70              |
| 820170180 | 180        | 0,70              |
| 820170200 | 200        | 0,80              |
| 820170225 | 225        | 1,10              |
| 820170250 | 250        | 1,12              |
| 820170275 | 275        | 1,12              |
| 820170300 | 300        | 1,30              |